


BEOLIFT

BF Standard

		BF25			BF30			
1.1	nosivost	kg	2500			3000		
1.2	tip pumpe		BF			BF		
Točkovi								
2.1	tipovi točkova		PU/RU/Nylon			PU/RU/Nylon		
2.2	veličina upravljačkog točka	ΦD mm	180*50	180*50	200*50	180*50	180*50	200*50
2.3	veličina nosećeg točka(jedan točak)	Φd mm	74*93	80*93	80*93	74*93	80*93	80*93
2.4	veličina nosećeg točka(dupli točak)	Φd mm	74*70	80*70	80*70	74*70	80*70	80*70
Dimenzije								
3.1	visina dizanja	h mm	120			120		
3.2	maksimalna visina viljuške	H mm	195	205	205	195	205	205
3.3	minimalna visina viljuške	H1 mm	75	85	85	75	85	85
3.4	širina viljuški	W mm	520/550/685			520/550/685		
3.5	dužina viljuški	L mm	800/900/1000/1070/ 1150/1220			800/900/1000/1070/ 1150/1220		
3.6	širina viljuške jedne	S mm	160			160		
3.7	debljina lima	mm	3			3.75		
3.8	težina	kg	61.5~68.5			71~78.5		

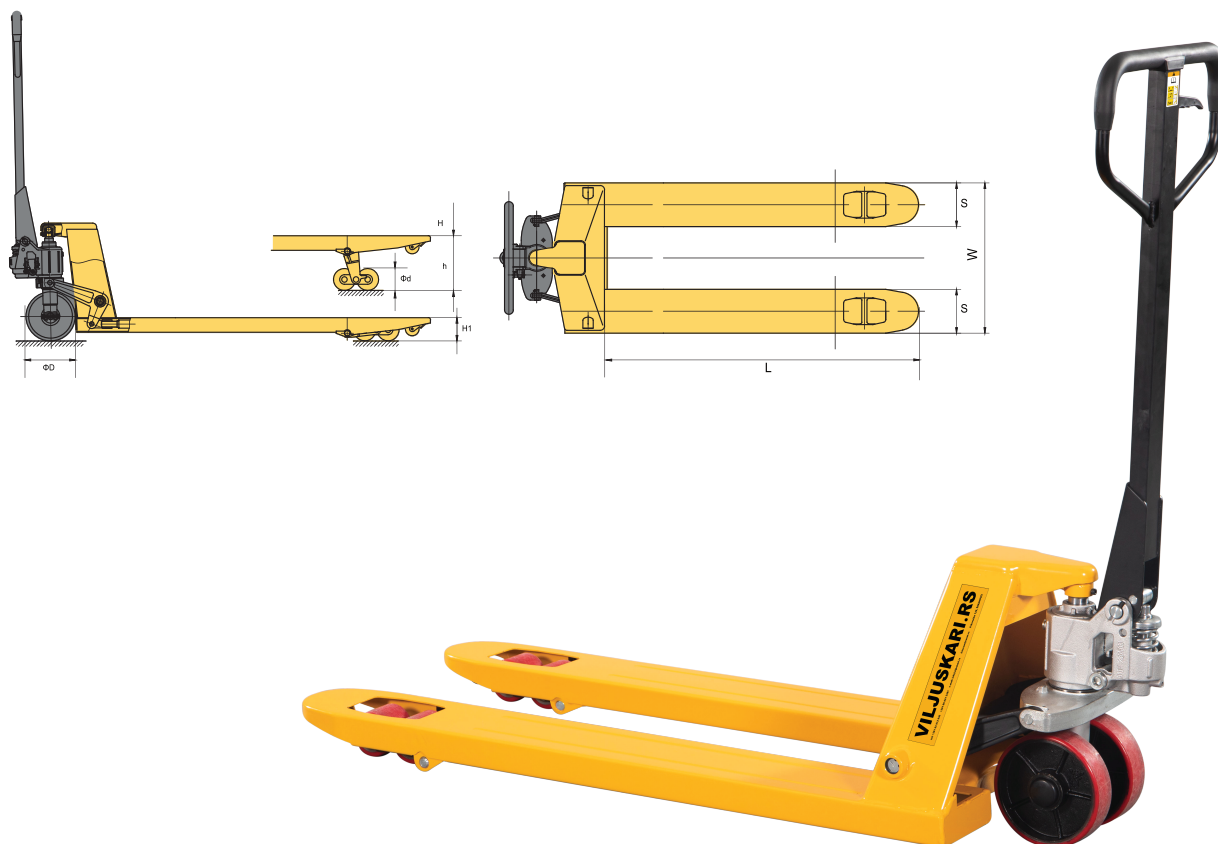

viljuskari.rs

FOTOCOMMERCE d.o.o
 Prhovačka 126, Šimanovci, Srbija
 info@viljuskari.rs
 +381 22 44 00 44 +381 63 512 936